

● ordering code

TGC/TGU series accessories

TGC

cylinder series
TGC TGU

32

Bore

LB

accessories code

Blank: standard style
F: Cast iron material


TGC: $\Phi 32-\Phi 250$
TGU: $\Phi 32-\Phi 100$

■ accessories table

Model /accessories	LB	FA	FB	CA	CB	TC
TGU	●	●	●	●	●	×
TGUD/TGUJ	●	●	●	×	×	×
TGC	●	●	●	●	●	●
TGCD/TGCJ	●	●	●	×	×	●
TGCT	●	●	●	×	×	×

■ figure dimension

● LB

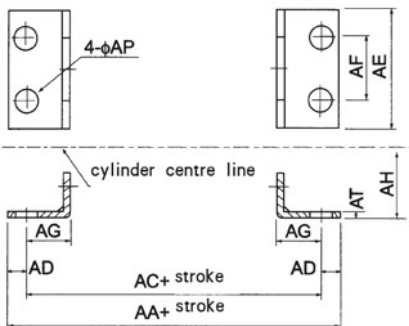


Bore	32	40	50	63	80	100	125	160	200	250
AA	153	169	173	184	199	209	221	246	276	323
AC	134	140	149	158	167	173	185	206	226	273
AD	9,5	14,5	12	13	16	18	18	20	25	25
AE	50	57	68	80	97	112	136	174	214	267
AF	33	36	47	56	70	84	104	134	163	201
AG	20,5	23,5	28	31	30	30	35	40	50	60
AH	28	30	36,5	41	49	57	70	91	113,5	141
AP	9	12	12	12	14	14	17	17	22	26
AT	3	3	3	3	4	4	6	8	9	15

● FA

● FB

Cast iron specification :
 $\Phi 32-250$

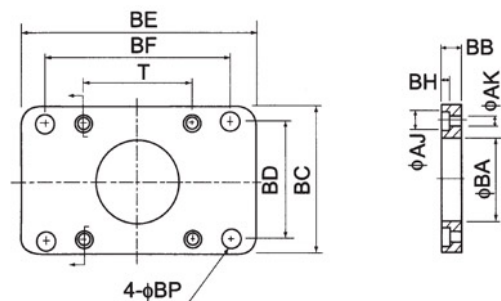


Bore	32	40	50	63	80	100	125	160	200	250
BA	28,3	32,3	38,3	38,3	47,3	47,3	—	—	—	—
BB	10	10	10	12	16	16	20	20	25	25
BC	47	52	65	76	95	115	135	173	213	255
BD	33	36	47	56	70	84	104	134	163	201
BE	72	84	104	116	143	162	196	248	286	256
BF	58	70	86	98	119	138	168	212	250	312
BH	6,5	6,5	6,5	8,5	10,5	10,5	—	—	—	—
AJ	10,5	10,5	10,5	13,5	16,5	16,5	—	—	—	—
AK	6,5	6,5	6,5	8,5	10,5	10,5	—	—	—	—
BP	7	7	9	9	11	11	14	18	18	22
T	33	37	47	56	70	84	104	134	163	202

TGC/TGU series accessories


● TC

Cast iron specification :
Φ32-250

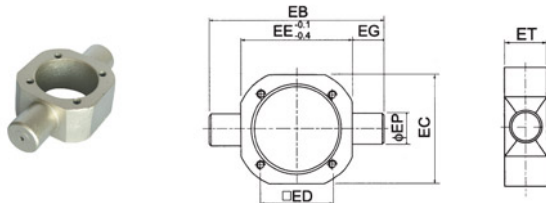

Bore	EB	EC	ED	EE	EG	EP	ET	S
32	87	53	33	55	16	16	30	37,5
40	113	63	37	63	25	25	30	45,5
50	126	76	47	76	25	25	30	55,5
63	138	88	56	88	25	25	30	69
80	164	114	70	114	25	25	35	87,5
100	182	132	84	132	25	25	40	107,5
125	208	—	104	158	25	25	40	136
160	272	—	134	200	36	36	46	174
200	318	—	163	246	36	36	46	214
250	394	—	202	304	40	45	56	267

● TCM

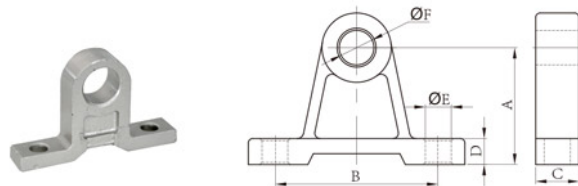


Bore	32	40	50	63	80	100	125	160	200	250
A	54	50	50	50	70	70	85	130	130	160
B	75	80	80	80	85	85	105	140	140	165
C	16	23	23	23	23	23	25	36	36	45
D	11	12	12	12	12	12	20	25	25	28
E	12	11	11	11	13	13	18	22	22	26
F	16	25	25	25	25	25	25	36	36	45

● CA

(Used with CB)

Cast iron specification : Φ32-250
Aluminium specification : Φ32-100

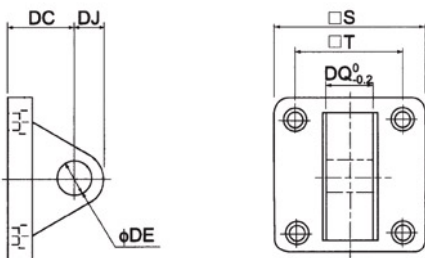


Bore	32	40	50	63	80	100	125	160	200	250
S	48	50	62	75	94	112	135	173	213	255
T	33	37	47	56	70	84	104	134	163	202
DC	34	34	34	34	48	48	32	40	60	70
DD	14	14	15	15	20	20	52	68	90	106
DE	12	14	14	14	20	20	20	28	28	36
DJ	14	14	15	15	20	20	17	19,5	23	24
DQ	16	20	20	20	32	32	31,7	39,7	39,7	49,7

● CB

(Used with CA)

Cast iron specification : Φ32-250
Aluminium specification : Φ32-100

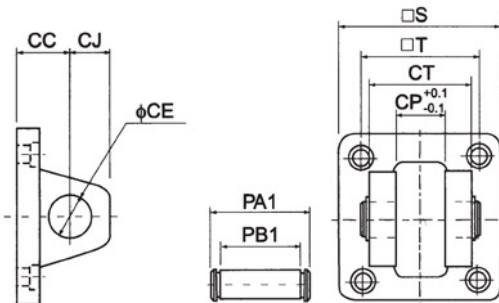

Bore	32	40	50	63	80	100	125	160	200	250
CC	19	19	19	19	32	32	32	40	60	70
CD	5	5	3	3	8	8	14	15	23	24
CE	12	14	14	14	20	20	20	28	28	36
CJ	13	13	15	15	21	21	52	68	90	106
CP	16,3	20,3	20,3	20,3	32,3	32,3	32,1	40,1	40,1	50,1
CT	32	44	52	52	64	64	64	80	80	100
PA1	41	51,8	60,3	60,3	73,8	73,8	73	90,2	90,2	130
PB1	33,5	45,5	54	54	65,5	65,5	64,8	80,8	80,8	108
S	48	50	62	75	94	112	135	173	213	255
T	33	37	47	56	70	84	—	—	—	—