

UWK Series Normally Open Solenoid Valve



● UWK-25




● UWK-20



● UWK-15

Graphics Sign



Ordering Code

UWK	—	10	AC220V
Series		Pipe size	Standard Voltage
		10 : ZG3/8	AC220V
		15 : ZG1/2	AC110V
		20 : ZG3/4	DC24V
		25 : ZG1	
		35 : ZG1 1/4	
		40 : ZG1 1/2	
		50 : ZG2	


Character

This guiding type valve adopts the diaphragm seal structure, with zero differential pressure starting function, large flow, simple structure, easy maintenance, good waterproof performance directions and multiple wiring directions.

Technical Parameter

Item \ Specification	UWK-10	UWK-15	UWK-20	UWK-25	UWK-35	UWK-40	UWK-50
Material of Body	Cast copper						
Operating Method	Film Pilot						
Nominal Diameter (mm)	16	20	20	25	37	37	50
Applicable Medium	Air, Water, Oil (50CST Below)						
Pressure Range	0 ~ 0.8MPa						
Medium Temperature	-10 ~ 60°C (No Freeze)						
Specified Voltage	AC24V, AC36V, AC110V, AC220V, DC24V, DC110V						
Operating Voltage Range	±10%						
Min. Activating Time	0.05S						
Install Method	Horizontal Installation						
Power	AC220V : 12.5VA, DC24V : 22.5W						

Figure Dimension

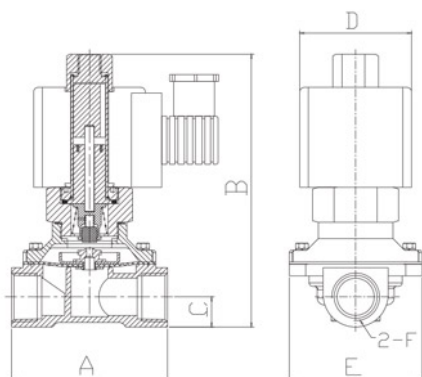

Specification	A	B	C	D	E	F
UWK-10	70	128	16	48	57	ZG3/8
UWK-15	70	128	16	48	57	ZG1/2
UWK-20	78	136	17	48	57	ZG3/4
UWK-25	102	145	23	48	73	ZG1
UWK-35	122	185	25	63	94	ZG1 1/4
UWK-40	122	190	28	63	94	ZG1 1/2
UWK-50	170	212	35	63	124	ZG2