


TF Series Solenoid Valve


Graphics Sign



Character

This valve adopts direct piston action and quick action, with multiple purposes, high efficiency, long service life, good waterproof performance, multiple wiring directions and handsome shape.

Ordering Code

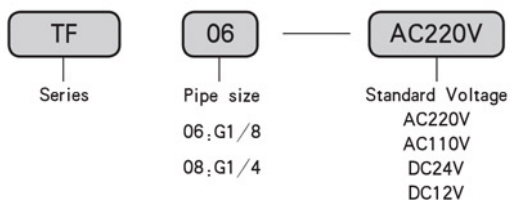

● TF-08

Technical Parameter

Item\Specification	TF-06	TF-08
Applicable Medium	Air, Water, Oil, Gas	
Operating Method	Direct Action Type	
Model	Normal closed	
Aperture	2.5	
CV value	0.23	
Pipe Size	G1/8"	G1/8"
Applicable Fluid consistence	Lower than 20CST	
Using pressure Kg/cm ²	0 ~ 0.7	
Highest pressure Kg/cm ²	1.0	
Medium Temperature	-5 ~ 60°C (No Freeze)	
The range of voltage	± 10%	
Material of Body	Project models steel	
Material of Seal	VITON	
Power	AC220V : 4.8VA, DC24V : 5W	

Figure Dimension

