

## PK Series Solenoid Valve




● PK-06




● PK-08

### Graphics Sign



### Ordering Code

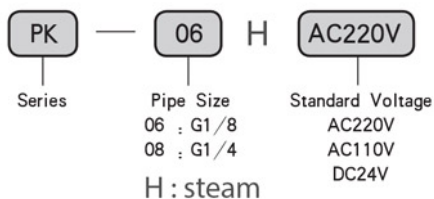

### Character

This valve adopts direct piston action and quick action, with multiple purposes, high efficiency, long service life, good waterproof performance, multiple wiring directions, handsome shape and adjustable flow.

### Technical Parameter

| Item \ Specification    | PK-06                                       | PK-08 |
|-------------------------|---------------------------------------------|-------|
| Material of Body        | Tin Bronze                                  |       |
| Operating Method        | Direct Action Type                          |       |
| Nominal Diameter(mm)    | 3                                           | 3     |
| Applicable Medium       | Air, Water, Oil(50CST Bellow), Steam        |       |
| Pressure Range          | 0 ~ 1.0MPa                                  |       |
| Medium Temperature      | -10 ~ 85°C (No Freeze)                      |       |
| Specified Voltage       | AC24V, AC36V, AC110V, AC220V, DC24V, DC110V |       |
| Operating Voltage Range | ±15%                                        |       |
| Min. Activating Time    | 0.05S                                       |       |
| Power                   | AC220V : 13VA, DC24V : 9W                   |       |

### Figure Dimension

