

VT Series High Frequency Valve




● VT307



● VT307V

● Ordering Code

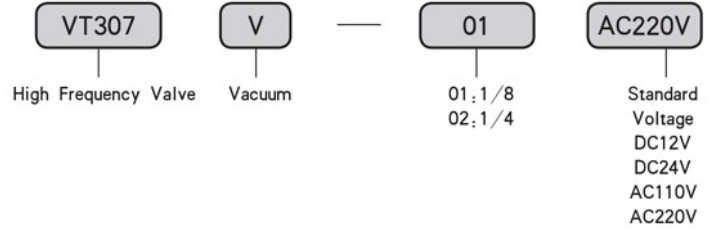

■ Graphics Sign



■ Solenoid Coil Specification

Plug Mode		Lead wire
Standard Voltage		AC : 110V, 220V (50Hz) DC : 12V, 24V
Allowable voltage range		-15 ~ +10%
		Class B or Equivalent (130°C)
Insulated Grade		Max 50°C
Temperature	AC	Start : 12.7VA, Keep on : 7.6VA
Power Consumption	DC	4.8W

■ Technical Parameter

Applicable Fluid	Air, inert gas
Engineering	Normally open or normally lose
Medium Temperature	-5 ~ 60°C
Respond time	Max 20 millisecc
Max action frequency	10 Cycles/Sec
Lubrication	Needless
Hand operating	Without lock
Impulsion force resistane/brisanse	15G/5G (40 ~ 1000Hz)
Protect structure	Dust proof
Pressure Range	0 ~ 0.8MPa
Pipe Size	G1/4

VT307

